

HYMER Crib Mercedes



Additional bed for:
MERCEDES Sprinter Chassis

Article number: 3234049
Installation time approx. 5 minutes

These installation instructions must be handed over to the customer.

Safety Instructions

HYMER does not assume any liability for damage caused by disregarding the work sequences and safety instructions.

The additional bed may only be used in accordance with its intended use. In addition to compliance with these safety instructions, proper use includes in particular compliance with the manufacturer's instructions for the authorized area of use. In particular, operation or use is not considered to be in accordance with the intended purpose:

- with maximum loads deviating from the manufacturer's specifications (max. 50 kg)
- with maximum size deviating from the manufacturer's specifications (only for persons < 150 cm)
- with point loads deviating from the manufacturer's specifications (not standing or jumping in the area "between the seats")
- with a lying position other than that specified by the manufacturer (upper body on the passenger seat, legs on the driver seat)
- with a scope of application other than that specified and authorized by the manufacturer, i.e. not suitable for children from 0 - 3 years
- not suitable for use with open windows

In addition, improper assembly and handling deviating from the operating and installation instructions invalidates the warranty claim against HYMER.

General notes

The installation of the additional bed is shown on a Mercedes Sprinter chassis. This additional bed has been specially made for this chassis type. Therefore, moderate force is sufficient to avoid damage during installation. It is not necessary to remove the front seats. The bed can be installed from the outside as well as from the inside.

Care instructions for the mattress cover

The mattress cover can be machine washed at 30°. Please note the sewn-in washing label

Care instructions for the packaging bag

We recommend to clean the leatherette with water or a weak soap solution if necessary. Please do not use strong detergents.

Care instructions for the fitted sheet

The fitted sheet can be machine washed at 40°. Please note the sewn-in washing label

Required tools

No tool is required

The installation principle - brief description



Starting position




Under floors



Substructure



Crib mattress

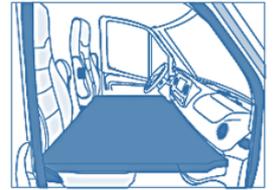

Complete crib
Built-in

Overview packaging & components of the crib



Crib packed – Carrying bag
(Initial situation)

Components of the packaging
also belong to the crib!

Backside of crib packed
(Carrying bag)

→ Underlay floor driver seat
(Black zipper)



Front side of crib wrapped
(Carrying bag)

→ Underlay floor passenger seat
(Blue zipper)

Unpacked packing (Carrying bag) from the crib

Residual
packaging - No
use in crib

→ Only necessary
for packaging /
carrying bag



Important:

*If the crib is dismantled again and put back into the transport bag, the following steps should be taken:
take remaining stock first*

join underlay passenger seat to blue zipper part of remaining stock

bottom piece without zipper should be within the remaining stock

place mattress in remaining stock with underbody passenger seat

underlay floor driver's seat now add to black zipper part of remaining stock

bottom piece without zipper should also be within the remaining stock

Installation

1. Apply parking brake



2. Move the front seats into position

First of all, the front seats have to be moved into an installation position. To do this, unlock the slide rails by lifting the bracket (1) and push the seat backwards into the last position. For the other seat, repeat the adjustment.



Unlock the levers (2) and (3) to bring the seat into a straight and high position.



Fold up all armrests



3. Installing the substructure

Remove the side panels from the pocket of the additional bed, by opening and unhooking the zippers.

Place the side panel with the blue zipper on the passenger seat and slide it into the gap between the seat and backrest.




Place the side panel with the black zipper and the recess for the steering wheel on the driver's seat and slide it into the gap between the seat and backrest.



4. Insert mattress

Place the foldable mattress between the front seats, unfold and place it on the base in the direction of the arrow so that the front edge of the mattress slides under the steering wheel ...

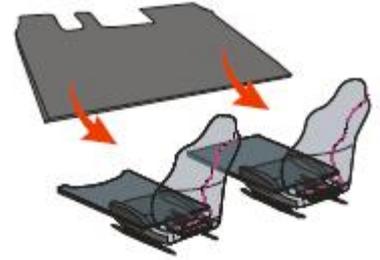

... but above the storage compartments.



Also on the passenger side, the mattress must lie on the dashboard storage compartment



The mattress adapts exactly to the contour of the dashboard.



Now the additional bed lies flat and straight in the vehicle. The supplied fitted sheet can now be pulled over the mattress without any problems

